


Lawn Lite

Cat. No. LL



The Lawn Lite is designed for insertion into a lawn or garden bed and can be mowed over without damaging the luminaire. Designed so the lamp can be directed up to 20 degrees at a bush, tree, or the outside of a building, etc. without the need to remove the luminaire from the ground due to the vandal-resistant three stainless steel allen head screw fixing system which attaches the flange to the body of the luminaire. With a 'Flush Fit' lens to stop water pooling and depositing dirt on the lens.


Ordering Information



Luminaire Type	Flange Option	Body	Accessories
LL - Lawn Lite	BZ - Bronze BK - Black GN- Green MS- Metallic Silver	Luminaires with a Stainless Steel or Bronze flange have a black body, otherwise body is the same as flange colour.	CJK150 - Cable Joint Kit LLFR - Frosted Lens
	BZ - Bronze (Solid) SS - 316 Stainless Steel		

Ordering Example LL GN - Lawn Lite Green, Flange Body Green

LLFR - Frosted Lens
(Accessories ordered separately)

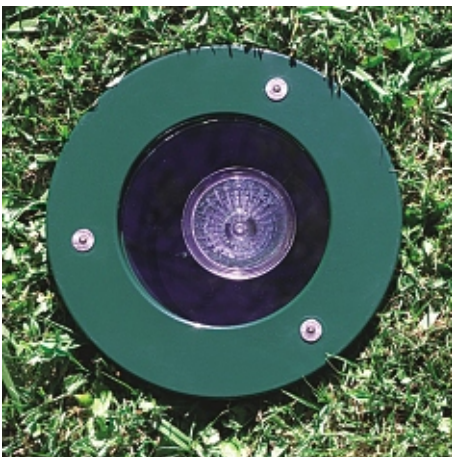

FACTORY: Ph. 64-9-570 2484 Fax. 64-9-570 1254. 31 Thomas Peacock Place, Auckland, New Zealand

USA: Ph. 310 560 7310 Fax. 1 877 692 4589. 3237 Long Island St, W. Sacramento, California 95691

hunza@hunza.co.nz www.hunza.co.nz

Manufactured in New Zealand

Specifications may change without notice.

© 2002 Hunza Holdings Ltd

Luminaire Construction

Body:

Cast from virgin high corrosion resistant CC401 low copper aluminium alloy, with chromate substrate and high UV resistant polyester powder coat -

Colours: Black, Bronze, Green, Metallic Silver.

Flanges:

The flange is attached to the body by three 316 stainless steel allen head anti vandal screws and is available in either -

Powder coated, cast aluminium or CNC machined from one of the following metals:

Solid bronze -150mm (6") bar.

Solid 316 Stainless Steel - 150mm (6") rod.

Mounting

Suitable for insertion into a lawn or gardens etc. Mounted level with ground surface, seated on its base.

Features

Lens:

12mm (½") 'Flush Fit' clear tempered shatter resistant glass.

Life Time Warranty.

Gasket:

Nytral 220c (428°f).

Lamp Holder:

GU5.3 350°c (662°f) ceramic multi contact lamp holder with 250°c (480°f) teflon cables. Lamp holder can be rotated 360° and angled up to 20°.

Accessories:

Cable Joint Kit (Cat. CJK150).
Not approved for USA / Canada.

Frosted Lens (Cat. LLFL).

Standards

IP66



UL1838

Luminaire Weight

LL .94kg (2lbs 1oz)

LLBZ 1.14kg (2lbs 8oz)

LLSS 1.13kg (2lbs 7oz)

Power Supply

HUNZA® Inground or Wall Mount
Transformer: not included.

USA and Canada:










HUNZA® Wall Mount Transformer:
not included.

Luminaire: supplied with

MR16 GU5.3 20, 35 or 50 watt
lamp max.

USA and Canada:

MR16 GU5.3 20 watt lamp max.

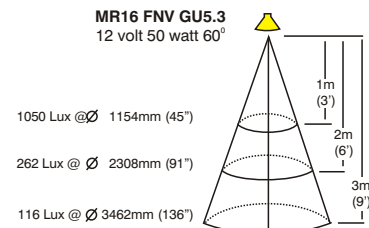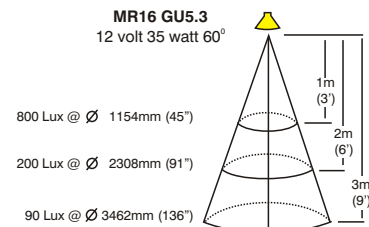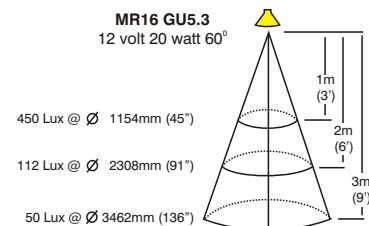

FACTORY: Ph. 64-9-570 2484 Fax. 64-9-570 1254. 31 Thomas Peacock Place, Auckland, New Zealand

USA: Ph. 310 560 7310 Fax. 1 877 692 4589.

3237 Long Island St, W. Sacramento, California 95691

hunza@hunza.co.nz www.hunza.co.nz

Manufactured in New Zealand

Specifications may change without notice.

© 2002 Hunza Holdings Ltd